



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

F25B 19/00, G05D 23/32

A1

(11) International Publication Number:

WO 99/32838

(43) International Publication Date:

1 July 1999 (01.07.99)

(21) International Application Number: PCT/US98/01550

(22) International Filing Date: 26 January 1998 (26.01.98)

(30) Priority Data:

08/996,750

23 December 1997 (23.12.97) US

(71) Applicant (for all designated States except US): INTELLIDYNE, LLC [US/US]; 2973 Brentwood Court, Wantagh, NY 11793 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HAMMER, Jack [US/US]; 2973 Brentwood Court, Wantagh, NY 11793 (US).


(74) Agents: GARVEY, Christopher, B. et al.; Nolte, Nolte & Hunter, P.C., 1077 Northern Boulevard, Roslyn, NY 11576 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: APPARATUS FOR REGULATING LENGTH OF COMPRESSOR CYCLES

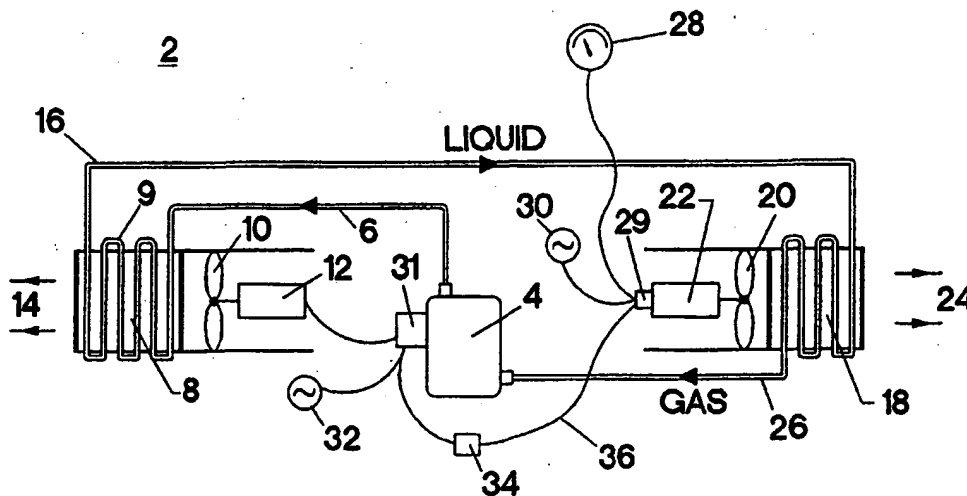

(57) Abstract

To regulate a cooling system operation, a value from an energy value sensor such as a thermostat (28) or pressure trol (40) is sensed and, if the value warrants a call for compressor operation, the call is made. The last compressor off-call-time (T0-T2) is stored in memory (61). If the off-call-time (T0-T2) is less than a short-cycle interval (T2-T3), the compressor (41) is delayed to allow substantial compressor pressure equalization. Compressor operation is delayed further for a percentage of the off-call-time (T0-T2). Compressor on-time (T1-T2) is also measured and, if on for a substantial interval, the compressor (4) is given a short rest (T3-T4). Improved efficiency results.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

APPARATUS FOR REGULATING LENGTH OF COMPRESSOR CYCLES

This application claims priority under 35 USC §119(e) of Provisional Patent Application Number 60/035,888, filed 1/23/97.

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or record, but otherwise reserves all copyright rights whatsoever.

FIELD OF THE INVENTION

The invention relates in general to devices that consume electrical energy in the process of generating a cooling medium used for the purposes of reducing the temperatures within an area requiring reduced temperatures.

This invention is particularly suited to reducing power consumption in refrigeration and air conditioning units.

It is the purpose of this invention to reduce the electrical consumption of the electro-mechanical device (compressor) responsible for the generation of the cooling media, be it gas or liquid, that is being distributed throughout the area to be cooled/refrigerated. This reduction of electrical energy must be accomplished without the undesirable side-effect of causing temperature fluctuations, within the controlled environment,

beyond those which existed before the installation of the invention.

BACKGROUND OF INVENTION

Air Conditioning/Cooling/Refrigeration systems (hereinafter "refrigeration systems" or "cooling systems"), which utilize compressors, are least efficient when starting up. Prior to reaching optimum running conditions, the average net BTU output of the refrigeration system is below its rated capacity. The optimum run conditions of a refrigeration system are not obtained until all of the component parts of the system have obtained their design operational temperatures. This can take considerable time after the compressor starts because the thermal inertia of each device, which was just off and is relatively hotter than when running, must be overcome. Some of the component parts of a refrigeration system are:

- a) Compressor
- b) Coolant-media (usually refrigerant gas).
- c) heat-exchangers:

the evaporator (the heat-exchanger used to absorb heat from the area to be cooled and transfer that heat to the coolant-media); and

the Condenser, the heat-exchanger used to release heat from the coolant-media to the external ambient environment.

- d) Coolant-media piping.
- e) Items within the controlled space which have thermal mass and inertia.

The invention increases the net BTU output of the refrigeration system by cycle control of the compressor. By intelligently increasing the delay between compressor run cycles, (the amount of which has been experimentally proven and to be within reasonable limits) longer more efficient (higher net BTU) output cycles are generated.

In connection with refrigeration systems, it is common knowledge that the output capacities of cooling systems are usually determined by:

- a) The worst case scenarios (design-loads) that the systems are expected to encounter.
- b) Anticipated future expansions.
- c) Expected degradation of the system output due to aging.

Anytime the demand on the cooling system is less than the cooling capacity, the cooling system is over-sized. This "over-sizing" condition exists, within a typical properly designed system, about 85% of the time and causes the cooling system to cycle the compressor in an inefficient and energy consuming fashion.

There is another system scenario that the invention also addresses; that is one where the compressor is undersized and

never shuts off. While it would seem that there is no way to save energy, other than to shut the compressor off, the invention does just that. After a predetermined amount of continuous run-time the compressor is stopped for a predetermined amount of time and then restarted. While it would appear to one skilled in the art that this would cause temperature fluctuations, in fact, experimentation with the present invention shows that it has less of an effect than that of a door being opened for that duration of time. The thermal inertia and thermal storage of the items within the controlled space are used, indirectly, as a capacitor of sorts to absorb these thermal transitions and they do just that.

It has also been proven experimentally that while extending the compressor off-time and subsequent lengthening of the on-time increases efficiency, there are certain limitations that the inventor feels must be addressed. In a properly sized refrigeration system (one that is cycling), extending the off-time beyond certain limits will cause temperature fluctuations and also will serve no useful purpose as far as energy reduction. Subsequently, the invention will not allow the extended off-time function to have any effect when the compressor has been off for longer than a predetermined time.

OBJECTS OF THE INVENTION

The present invention seeks to:

- A) Reduce the electrical consumption of cooling/refrigeration systems by the modification of compressor run cycles.
- B) Provide compressor anti-short-cycling control to enhance compressor life expectancy and to further reduce electric consumption.

The invention, through the use of computer technology, is able to determine the thermodynamic loading imposed upon the compressor, without the need of any additional sensors, and to alter the compressor cycling pattern in such a fashion as to cause the cooling capacity of the system to more closely match the demand of the system. This more efficient ratio of capacity vs. demand causes a more efficient use of each compressor cycle and thereby a reduction of electric consumption.

It is well known in the industry about the effects of short-cycling a compressor. Short-cycling causes undue stress on the compressor as well as much greater than normal electrical demands due to locked-rotor conditions which can occur as a result of non-pressure-equalization within the compressor. This condition is caused by an insufficient time-lapse between when the compressor is stopped and then restarted. Another factor of short-cycling is the excess heat buildup in the motor windings which can be caused by repeated rapid starting of the

compressor. To this end, the invention incorporates an anti-short-cycling algorithm as part of its program.

It is therefore desirable for the invention to be an energy saving device capable of being used in cooling energy value sensor (such as a thermostat or pressuretrol) demand type control systems. It is not limited to such applications, but would also be suited for use with energy management systems. This invention would be suitable for new, retrofit and original equipment manufacturer (OEM) installations. It is also the invention's intent to be simple to install and not require any programming or adjustments.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A is a diagrammatic representation of a typical refrigeration systems, using Thermostat control.

Figure 1B is a diagrammatic representation of a typical refrigeration systems, using pressure control.

Figure 2 is a typical installation wiring diagram.

Figure 3 is an electronic schematic.

Figure 3A is another embodiment of the schematic of Figure 3.

Figure 4 is a chart graphing system vs. load characteristics with and without the invention.

Figure 5 is a chart graphing compressor cycling pattern for given load, with and without the invention, portraying cycle reduction with the invention.

Figure 6 is a chart graphing compressor cycle pattern with and without the invention illustrating the maximum on-time effect of the invention on the compressor cycling when the compressor would not normally cycle.

Figure 7 is a chart graphing compressor cycles with and without the invention, displaying the effect of the anti-short-cycling algorithm.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1A, shows a refrigeration system, generally designated 2, which includes the present invention. The system comprises a compressor 4, which pumps high pressure gas through high pressure pipe 6 to condenser 8. Fan 10 is propelled by motor 12, and drives air 14 across condenser 8 to cool the condenser coils 9, and the gas therein, causing the gas to condense to liquid and give up its heat of condensation. Through the length of the condenser 8, large amounts of heat are lost to cooling air 14, which brings down the temperature and heat content of the media leaving the condenser, bringing said media to a liquid state. The liquid media is driven by pressure and it flows from condenser 8 through liquid pipe 16.

Liquid media flows along the liquid pipe 16, to evaporator 18, where fan 20, driven by motor 22, drives hot air 24 to be

cooled by the evaporator 18. The liquid media from liquid pipe 16, in evaporator 18 absorbs heat from the air 24, and the media evaporates, absorbing the heat of evaporation, and exits along low pressure gas pipe 26, returning to compressor 4, which again drives it through its cycle via high pressure gas pipe 6.

Energy value sensor, thermostat 28 controls fan motor 22, by closing a relay 29 between current source 30 and fan motor 22. Absent the invention, thermostat 28 would simultaneously close relay 31 between current 32 and compressor 4, so that current could flow across relay 31 and would actuate power compressor 4.

However, control apparatus 34 of the present invention interrupts the connection 36, which provides voltage to relay 31, and thereby prevents the compressor 4 from turning on. This results in a delay, which is controlled according to the program outlined further below.

In figure 1B, control apparatus 34 is interposed in the wire 39 between the compressor 4 and energy value sensor, which is pressuretrol 40. Pressuretrol 40 is typically found as the temperature equivalent sensor on a refrigeration unit. A program also provides an appropriate delay to increase efficiency.

Figure 2 is a typical installation wiring diagram which shows a control unit 34 of the present invention, wired into

the cooling circuit. Figure 2 shows control circuit power 42, which may be 230, 115 or 24 volts AC in the embodiment shown depending on which contact 44 a, b, or c it is attached to. Wires 44-46 supply control circuit power to control unit 34.

The same voltage is supplied across existing thermostat 28 or pressuretrol 40. Control wire 36 or 39 would provide control voltage to compressor contactor relay 31, but is broken so that yellow wire 48 and blue wire 49 insert control unit 34 into the circuit to prevent the compressor from operating until an appropriate delay has intervened.

Figure 3 is a more detailed circuit diagram of the control unit 34. AC power is supplied by wires white 44 and brown 46 to transformer 47, then to rectifier 50, comprising four ring diodes, which rectifies the AC to DC. Approximately 14 volt DC is output across smoothing capacitor 56 to voltage regulator 57 across bypass capacitor 58 to pin 1 of BS-1. BS-1 distributes 12 volts DC to control circuit 60 and its micro-controller chips 61 and memory 62 via voltage regulating chip 63 and power-on reset chip 64. Light Emitting Diode 101 (LED) indicates mode status. LED 102 indicates if an energy value sensor is calling for compressor. Optoisolator 104 provides a sensor call to the controller over a wide range of possible call voltages, making this unit well suited for a variety of cooling systems.

While the units presently being tested are shown in figure 3, the inventor has constructed a unit using fewer of the chips

which are now available. Cost may vary but the units are electronically equivalent, where a single chip replaces chips 61 and 62, and chips 63 and 64 are eliminated. See Fig. 3A. Further variations may be constructed by appropriately using component manufacturers' specifications to create equivalents. It will be understood that the best mode of constructing the controller will vary with the availability and capability of new chip designs.

Controller 34 operates according to the computer program at the end of this specification, entitled "COOLING ROUTINE".

The program incorporates a 180 second anti-short-cycling delay to always avoid starting the compressor within 180 seconds of compressor shut down. This is sufficient time to reduce undue stress on the compressor, as well as much greater than normal electrical demands, due to locked-rotor conditions, by allowing pressure-equalization within the compressor. A 180 second rest reduces excess heat buildup in the motor windings which heat can be caused by repeated rapid starting of the compressor. An anti-short-cycling algorithm tests off-time against the program constant MINOFFTIME, before allowing the compressor to start.

If the compressor off-time has been greater than 1 hour, the compressor is started immediately upon a call for cooling, the counter is reset, and a new count begins.

If off-time has not been greater than an hour, the delay is calculated as 10% of the last off time, and a countdown for that interval from the sensor call continues. Once the countdown ends, the compressor relay actuates the compressor, and a new timecount starts.

The compressor continues running until:

the sensor call ends, which starts a new off-time count;
or

a substantial run time elapses, sufficient to bring the space to be cooled to equilibrium, such as an hour, at which time the compressor is given a short rest, but sufficient to allow compressor pressure equalization and compressor motor cooling, such as a 6 minute rest, before restarting.

Figure 4 graphs the difference between:

standard compressor on/off time cycles, and

the compressor on/off time cycles with the present invention,

under three different load conditions: loads A, B, and C.

These graphs also show the response of the compressor to varying temperature or pressure depending on whether the cooling system is controlled by a thermostat or a pressuretrol.

Without the invention T1, T6 and T11 represent points on the temperature or pressure graphs that correspond to points when the compressor is started. T3, T8 and T13 correspond to the temperature or pressure levels when the compressor is stopped.

With the invention T2, T7, and T12 correspond to the new temperature or pressure compressor start points. T4, T9 and T14 correspond to the respective longer intervals before the compressor stop points. T0-T1, T5-T6 and T10-T11 are the time intervals from the last compressor shut-down to a point when there is a need for cooling, hereinafter the off-call-time.

T0-T2, T5-T7, and T10-T12 are the new off-intervals required due to the invention, including the invention's extended off-intervals of T1-T2, T6-T7 and T11-T12.

Figure 5 graphs the effect of a load, over seven cycles of a conventional cooling system, without the present invention (top). As can be seen on the bottom of figure 5, the same load is handled in only five on-cycles, with reduced on-time, with the present invention. Temperature excursions beyond the high point are insignificant and brief. The graph also illustrates the compressor response either to temperature or cooling media pressure, depending on whether the energy value sensor is a thermostat or a pressuretrol.

Where T1 represents the compressor turn-on point along the temperature or pressure curves without the invention, T2 represents the new turn-on point and includes the extended off-time T1-T2, with the invention, T3 corresponds to the turn-off point of the temperature or pressure curves without the invention; T4 with the invention.

Figure 6 graphs a saturation load. Without the invention, the compressor runs continuously. The invention gives the compressor a 6 minute rest (T3-T4; T5-T6; etc.) every 54 minutes (T2-T3, T5-T6, etc.), to cool down, to save energy in the brief off-time. Temperature (not graphed) is largely unaffected by this rest period.

Figure 7 graphs a short cycle restart without the invention. The T1-T2 interval is too short to equalize compressor pressure or to cool the motor coils. A severe and power consuming electrical load results, that might even burn out the motor.

With the invention, the short compressor off-time (T1-T2) is extended by T2-T3 to an adequate 3 minutes (T1-T3), resulting in an easier starting load on the motor.

All the above time values are optimized in this presently preferred embodiment, but it will be appreciated that advantages of this invention can be achieved in spite of various departures from the above time and percentage values.

Insert after this page 3 pages of the copyrighted computer
program

hammer~3.doc on blue disk

```

'COPYRIGHT 1997 JACK N. HAMMER
'
'
'THERMOMISER PROGRAM
'COOLING ROUTINE
'12/27/96
'
'rev 1
'6/19/97 changed from 2 leds to 1
'rev 2
'8/29/97 added max ON-TIME, OFF-TIME, OFF TIME, AND ANTI SHORT-CYCLING.
'
'*****SYMBOLS - CONSTANTS*****
SYMBOL TRUE = 1
SYMBOL FALSE = 0
SYMBOL ON = 1
SYMBOL OFF = 0
SYMBOL NOT_ON = 0
SYMBOL NOT_OFF = 1
SYMBOL FLAG_REG = B0 'FLAG BYTE, CONTAINS BITS B0 - B7
SYMBOL COUNT = BIT0 'USED AS A SECOND (TIME) GENERATOR XOR'D WITH 1
SYMBOL MULTCNT = BIT1 'set when a percent delay has been calculated
SYMBOL DWNCNTFLAG = BIT2 'set when counting down for delay
SYMBOL MINOFFFLAG = BIT3 'rev2 -- flag for anti-short-cyclind set when ok to run
'SYMBOL BYPASSFLAG = BIT4 'not used
SYMBOL LED1 = PIN1 'pin used to control led
'SYMBOL LED2 = PIN2 'rev.1
SYMBOL CALL4COOLIN = PIN6 'input sense when call for compressor
SYMBOL COOLOUT = PIN7 'relay control pin
SYMBOL COUNTER = W1 'reg used for counting up & down
SYMBOL PERCOUNTER = W2 'temp reg for percent calculation
SYMBOL MULTLIM = W3 'reg used for multiplier upper limit
SYMBOL PERCENT_DELAY = 10 'used for delay time mutiplier factor
SYMBOL OFFTIME = 360 'rev2 -- 360 forced off cycle time
SYMBOL MAXONTIME = 3240 'rev2 -- max on time (seconds) before forcing off
SYMBOL MAXOFFTIME = 3600 'rev2 -- max off time (seconds) causing instant on
SYMBOL MAXCOUNTER = W4 'rev2 -- word used for on-time counter
SYMBOL MINOFFTIME = 180 'rev2 -- 180 anti-short cycling time delay

'INITIALIZE VARIABLES
DIRS=10000110 'SETS PINS 1,2 AND 7 FOR OUTPUT
COOLOUT = NOT_OFF 'ENERGIZES RELAY
COUNTER = 0: PERCOUNTER = 0 'RESETS FLAGS TO KNOWN STATE
MAXCOUNTER = 0 'rev2 - set to known value
MULTLIM = 65535 / PERCENT_DELAY 'set multlim to value, used in off time
calculation
FLAG_REG = FALSE 'resets all flags
PAUSE 450 'delay

'*****main routine*****
MAIN:
PAUSE 450 'loop time delay used for timing
COUNT = COUNT ^ 1 'generates seconds
IF CALL4COOLIN = NOT_ON AND MINOFFFLAG = TRUE THEN MAINTTEST' rev2
' rev2 IF CALL4COOLIN = NOT_ON THEN MAINTTEST
MINOFFFLAG = FALSE' rev2

```



```

IF DWNCNTFLAG = TRUE THEN ZEROCTR
COOLOUT = NOT OFF
'LED1 = ON 'rev.1
'LED2 = OFF 'rev.1
'led1 = off 'rev.2
led1 = call4cooln ^ 1 ' rev2 reverses led blink during anti short cycle
pulsout 1,5000 'pulses led
MULTCNT = FALSE
GOSUB COUNTUP 'counts up during compressor off time
GOTO MAIN

***** main test *****
'this loop is jumped to when there is a need for cooling
MAINTEST:
IF COUNTER>MAXOFFTIME THEN STARTNOW 'rev2 -- if greater than 1 hr. start
IF MULTCNT = FALSE THEN MULTIPLY 'tests for delay calculation
IF MAXCOUNTER>MAXONTIME THEN OFFCYCLE 'rev2 -- tests for long on-time
IF COUNTER = 0 THEN COOLON 'if delay has expired, start compressor
GOSUB COUNTDOWN 'counts down when in delay mode
GOTO MAIN
*****

'calculates delay time
MULTIPLY:
MULTCNT = TRUE
IF COUNTER > MULTLIM THEN MULTIPLY2 'this makes sure that the result can not
exceed 65535
PERCOUNTER = COUNTER * PERCENT_DELAY / 100
COUNTER = PERCOUNTER
GOTO MAIN
MULTIPLY2:
PERCOUNTER = COUNTER / 100 * PERCENT_DELAY
COUNTER = PERCOUNTER
GOTO MAIN

COOLON:
COOLOUT = NOT ON
rem LED1 = OFF
rem LED2 = ON
led1 = on
GOSUB MAXTIMECOUNT 'rev2
GOTO MAIN

ZEROCTR:
DWNCNTFLAG = FALSE
COUNTER = 0
GOTO MAIN

COUNTUP:
IF MINOFFFLAG = FALSE AND COUNTER > MINOFFTIME THEN SETMINOFFFLAG 'rev2
COUNTER = COUNTER + COUNT MAX 65534
RETURN

SETMINOFFFLAG:
MINOFFFLAG = TRUE
GOTO COUNTUP:

```

```
COUNTDOWN:
DWCNTFLAG = TRUE
LED1 = COUNT
COUNTER = COUNTER - COUNT
COUNTER = COUNTER MIN 0
PAUSE 50
RETURN
```

```
MAXTIMECOUNT: 'rev2
MAXCOUNTER=MAXCOUNTER + COUNT 'rev2
RETURN 'rev2
```

```
OFFCYCLE: 'rev2
COOLOUT = NOT_OFF 'rev2
COUNTER = OFFTIME 'rev2
MAXCOUNTER = 0 'rev2
led1 = OFF 'rev2
GOTO MAIN 'rev2
```

```
STARTNOW: 'rev2 causes compressor on by putting counter to 0 and multcnt
COUNTER = 0 ' true. this fools the program into thinking that the unit
MULTCNT = TRUE ' went thru a normal cycle.
GOTO MAINTTEST 'rev2
```

COOLING SYSTEM PATENT CLAIMS

I claim:

1. A method of regulating a cooling system operation comprising the steps of:
 - measuring an off-call-time of a compressor control circuit;
 - sensing a compressor call from an energy value sensor; and
 - preventing the operation of the compressor for an interval which is a function of the off-call-time.
2. A method according to claim 1 in which operation of the compressor is prevented unless and until the off-call-time exceeds a predetermined value, which value allows for substantial compressor pressure equalization.
3. A method according to claim 1 further comprising the steps of:
 - storing the off-call-time last measured in a memory;
 - calculating a percentage of the off-call-time;
 - preventing compressor operation for a delay equal to the percentage; and
 - operating the compressor subsequent to the delay.

4. A method according to claim 1 further comprising the steps of:

measuring an on-cycle of compressor operation time;
stopping operation of the compressor after the on-cycle has extended for a substantial on-time interval; and
the step of interrupting operation of the compressor is for a measured off-time of a rest interval, which rest interval is short but sufficient to allow:

compressor equalization,
compressor motor cooling, and
efficiency resulting from a rest interval, which is brief, during which a space temperature is substantially maintained by a thermal inertia of any cooled objects and fluids in the space.

5. A method of regulating a cooling system operation comprising the steps of:

- sensing a value from an energy value sensor;
- determining from said value whether the value warrants a call for compressor operation;
- generating a call when warranted;
- measuring an off-call-time prior to said call from a previous compressor shut down;
- storing the off-call-time last measured in a memory;
- delaying operation of the compressor if the off-call-time is less than a short-cycle interval which short-cycle interval would allow substantial compressor pressure equalization ;
- calculating a percentage of the off-call-time;
- preventing compressor operation for a delay equal to the percentage;
- operating the compressor subsequent to the delay;
- measuring an on-cycle of compressor operation time;
- interrupting operation of the compressor after the on-cycle has extended for a substantial interval sufficient to bring a space to an equilibrium temperature; and
- preventing operation of the compressor for a predetermined rest interval, which rest interval is short but sufficient to allow:
 - compressor equalization,
 - compressor motor cooling, and
 - improving efficiency by saving energy during the rest interval,

during which rest interval a thermal inertia of any cooled objects and fluids in the space substantially maintains a temperature in the space.

6. A method according to claim 5 in which a following set of optimal values are substantially used:

- the short cycle interval is three minutes;
- the percentage is ten percent;
- the substantial interval is 54 minutes; and
- the rest interval is 6 minutes;

7. In a cooling system comprising a compressor, a cooling media, and a heat exchanger, an improvement comprising:

- an energy value sensor;

means:

- for sensing the energy value sensor,
- for controlling the compressor, and
- for preventing the energy value sensor from running the system compressor:

8. Apparatus according to claim 7, in which the controlling means includes:

- a break in a power supply wire between:

- the energy value sensor, and

- the compressor; and

- means for switchably bridging said break.

9. Apparatus according to claim 8 in which the means for sensing the energy value sensor comprises:

a hot wire switched on by the energy value sensor in response to an energy value at which the space requires more cooling; and

switch means for actuation by a voltage on the hot wire.

10. Apparatus according to claim 9 in which the switch means for actuation by a voltage on the hot wire is an electronic circuit for sensing a wide range of voltage inputs.

11. Apparatus according to claim 10 in which the wide range of voltage inputs is between 24 VAC and 240 VAC.

12. Apparatus according to claim 10 in which the electronic circuit comprises an optoisolator.



13. Apparatus according to claim 10 in which the electronic circuit comprises a microcontroller.

14. Apparatus according to claim 13 in which the improvement serves as a means:

for increasing a run-time per cycle of the compressor, and thereby

for improving electric utilization and for decreasing a total run-time of the compressor.

15. Apparatus according to claim 7 in which the energy value sensor is a thermostat.
16. Apparatus according to claim 7 in which the energy value sensor is a pressuretrol.
17. Apparatus according to claim 8 in which the switch means is in a normally closed position so that, if the power supply or controller fail, the cooling system still operates.

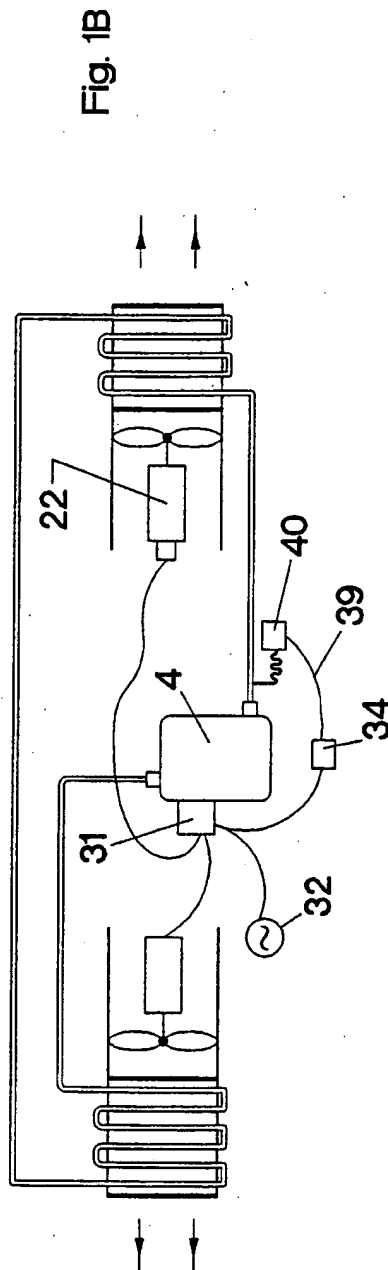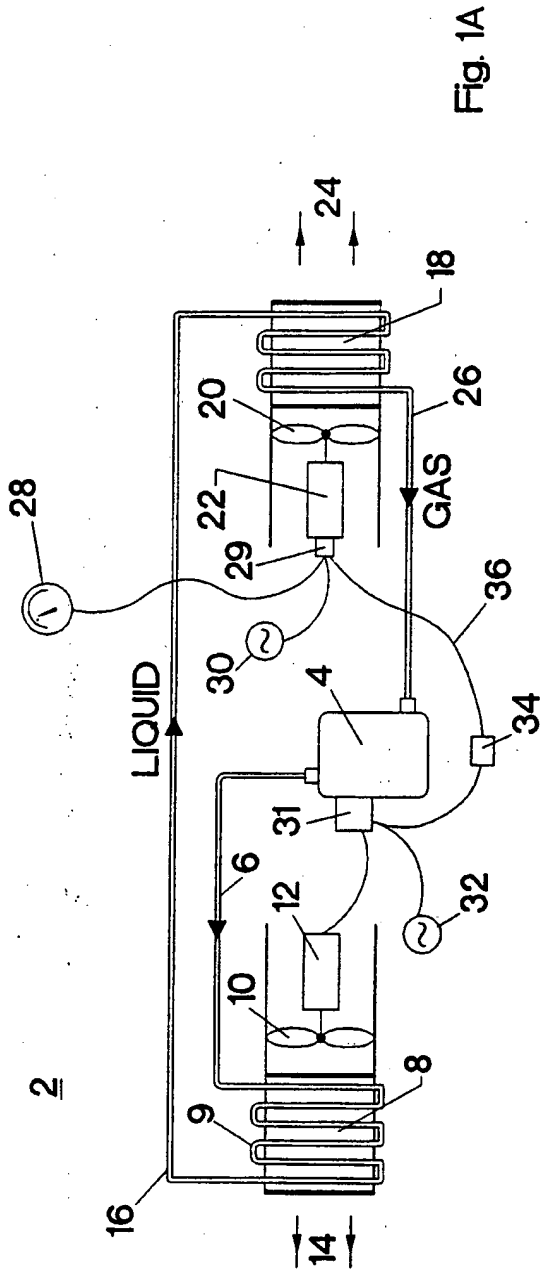

2/7

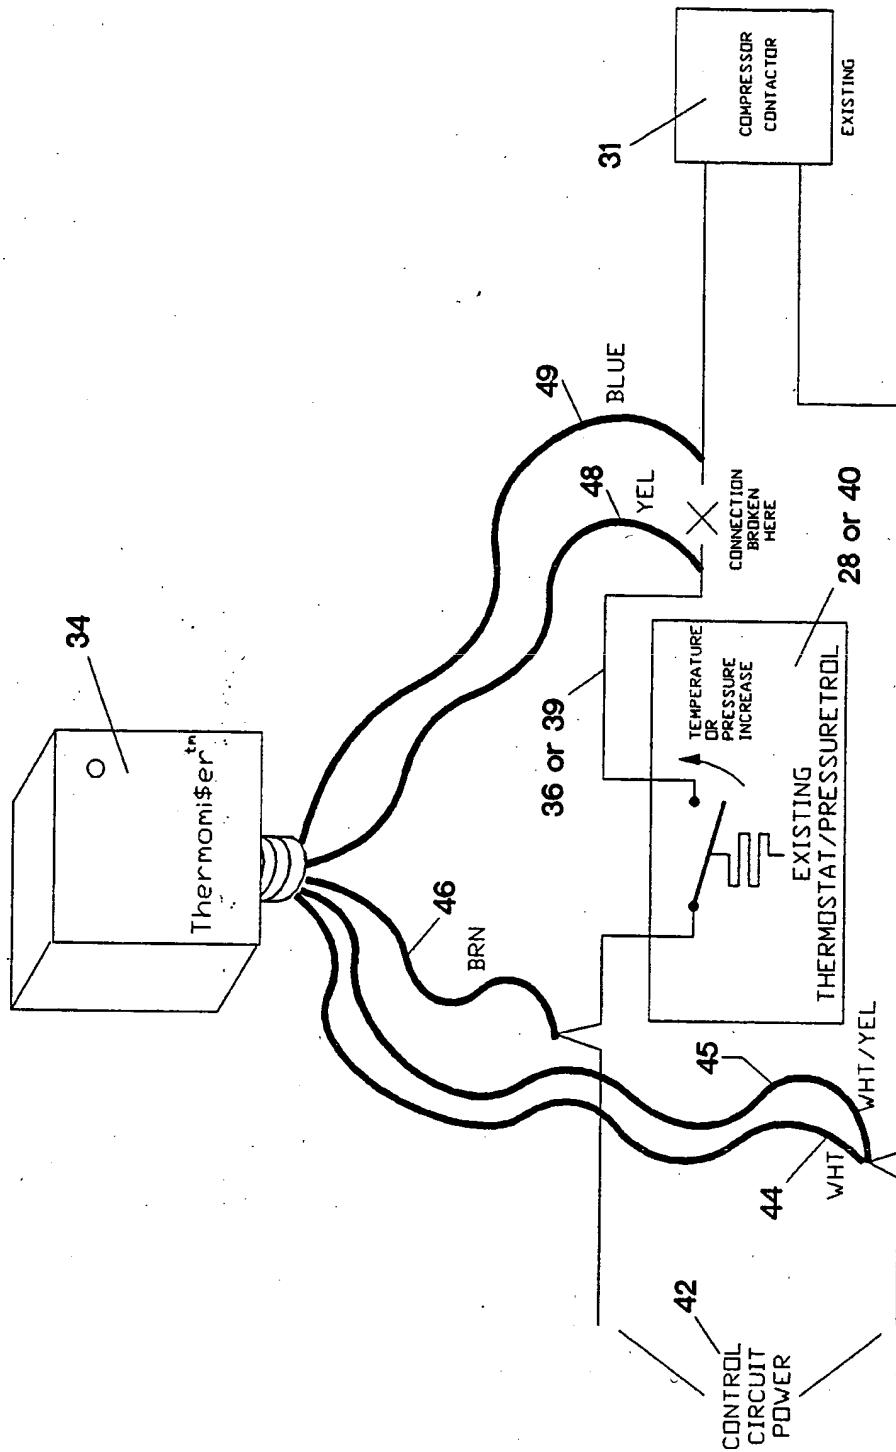


Fig. 2

3/7

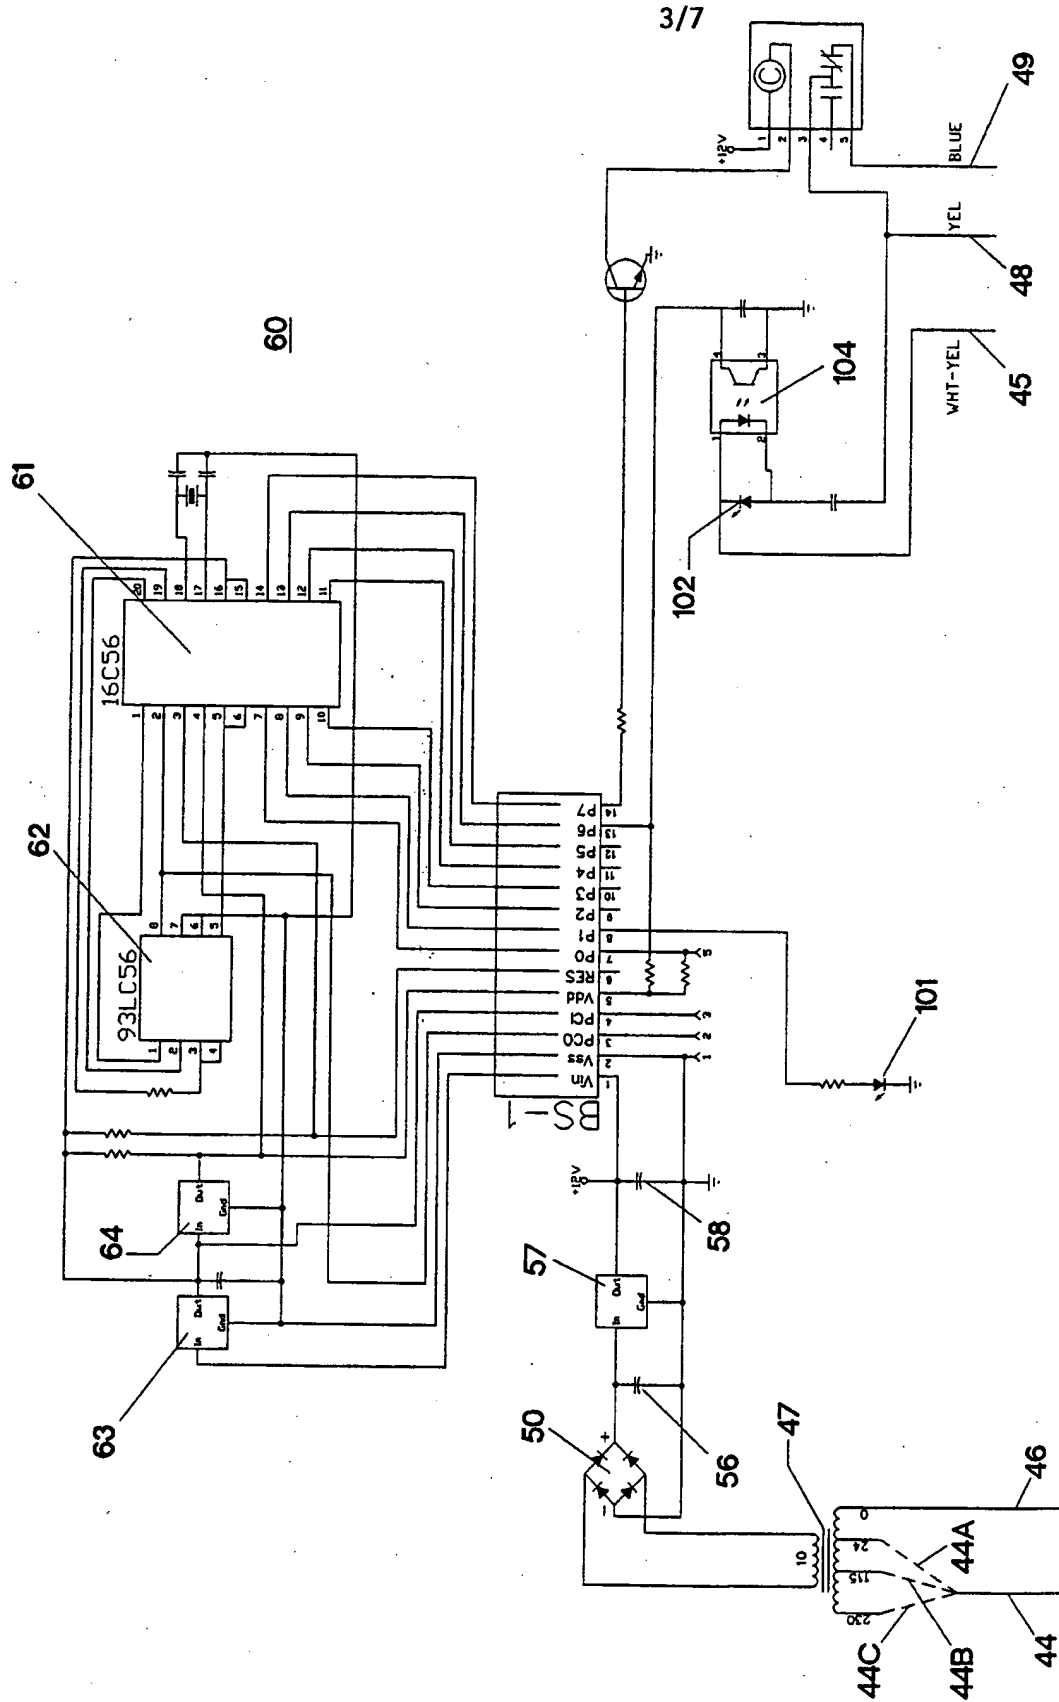


Fig. 3

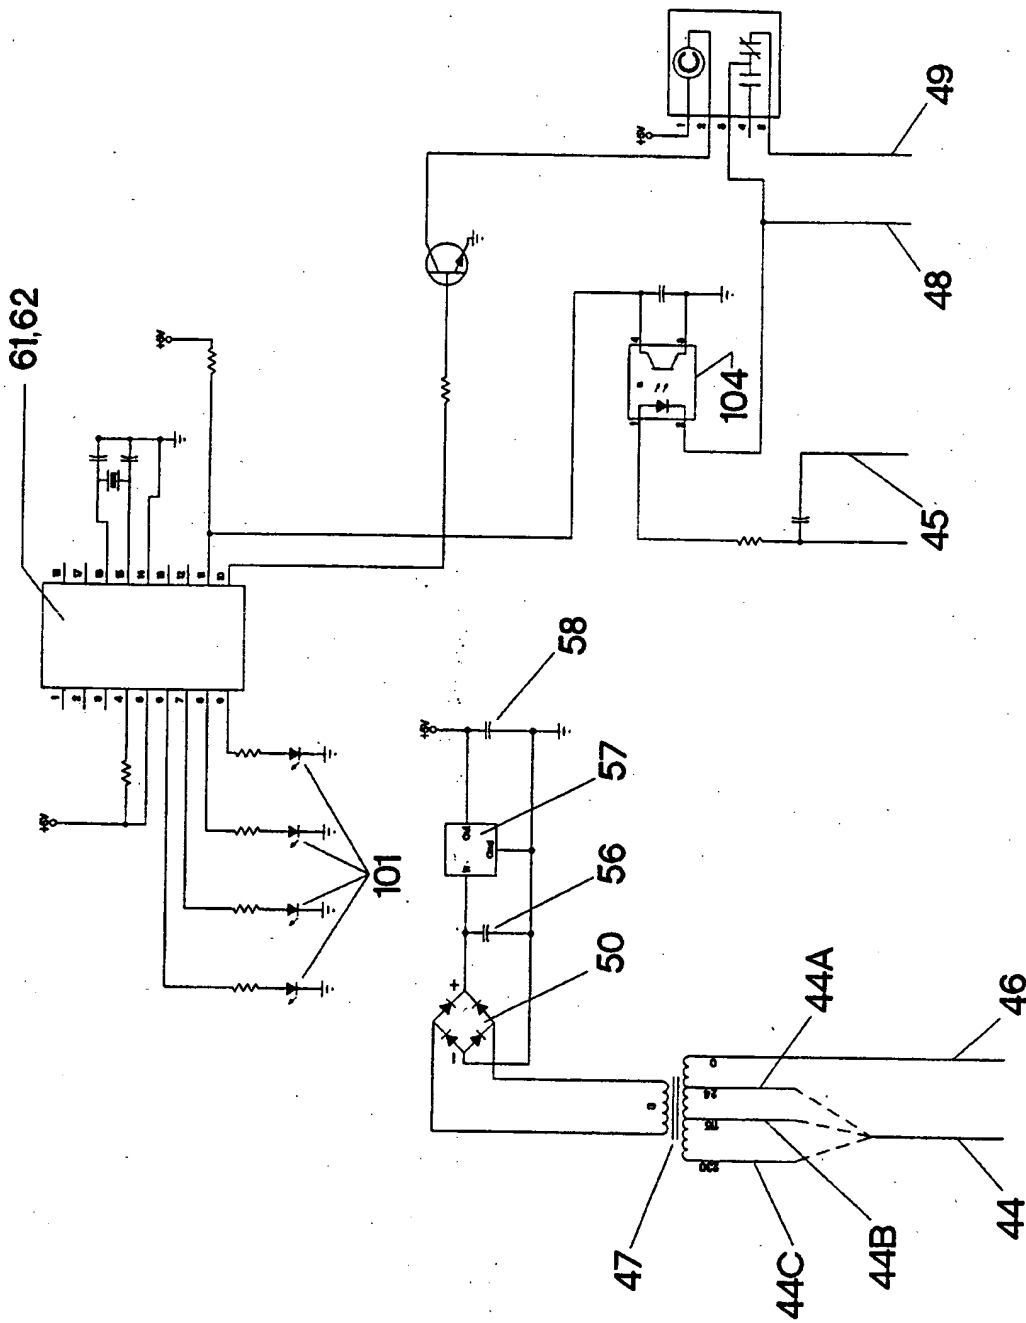


Fig. 3A

5/7

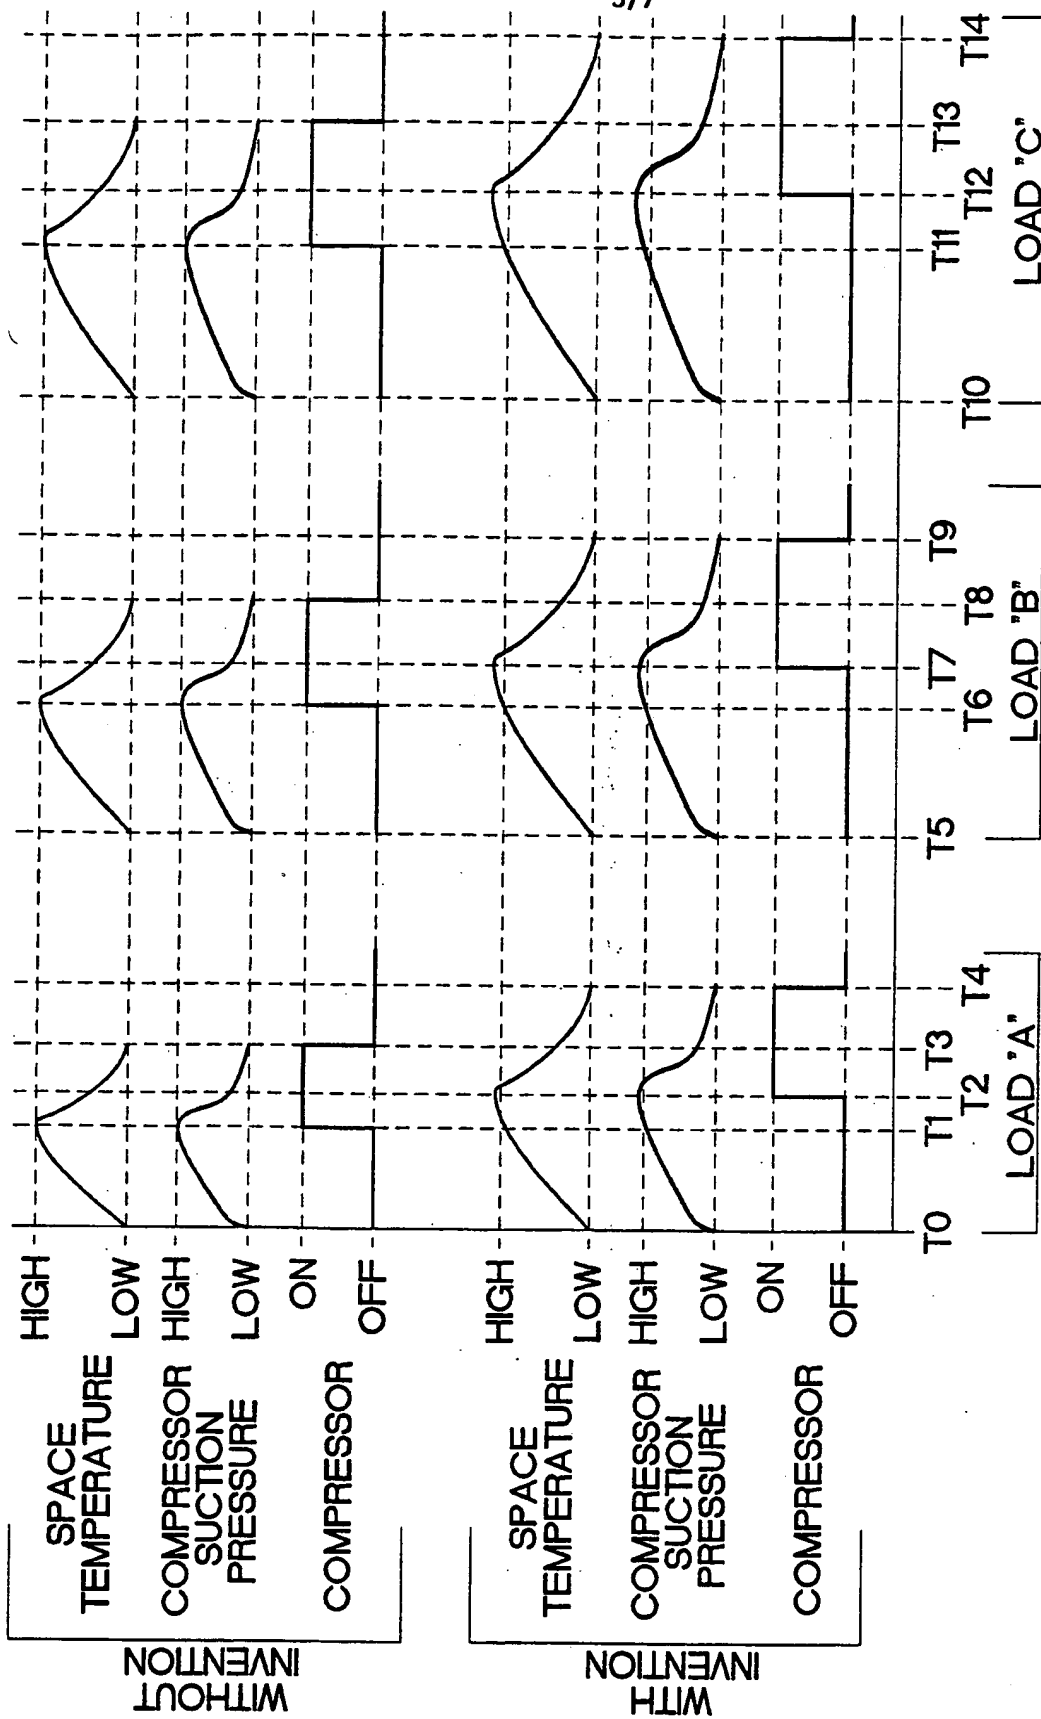


Fig. 4

TIME →

6/7

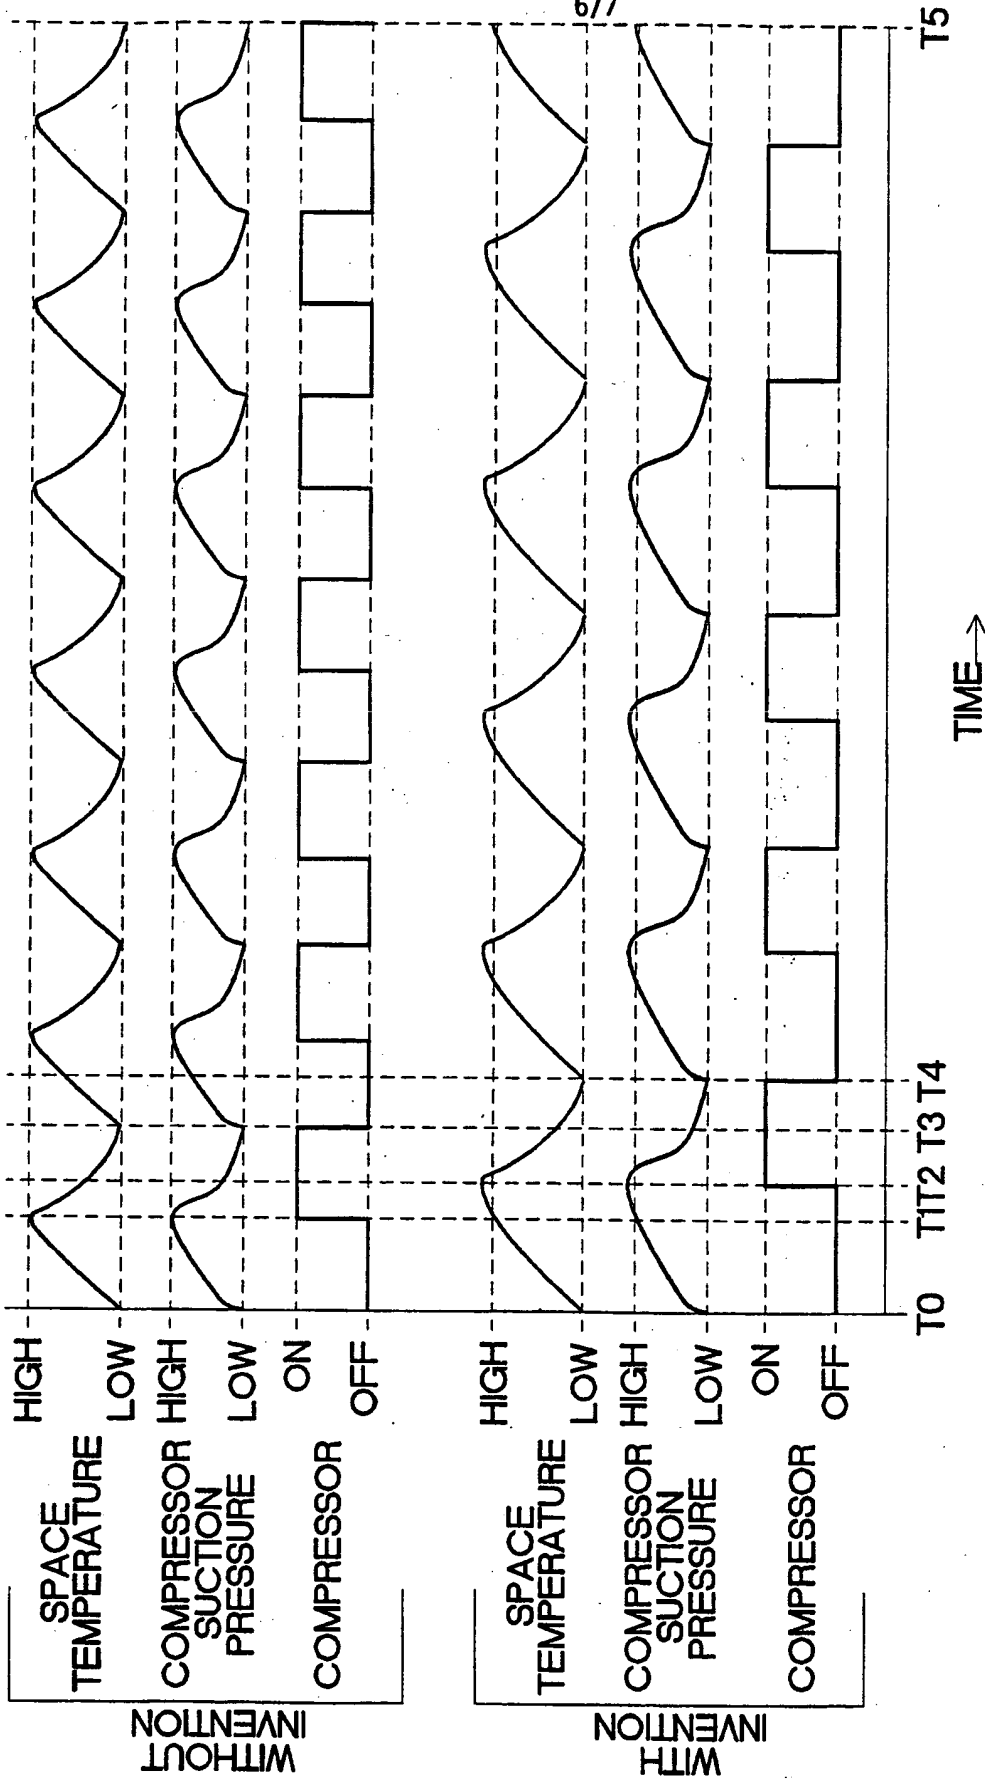


Fig. 5

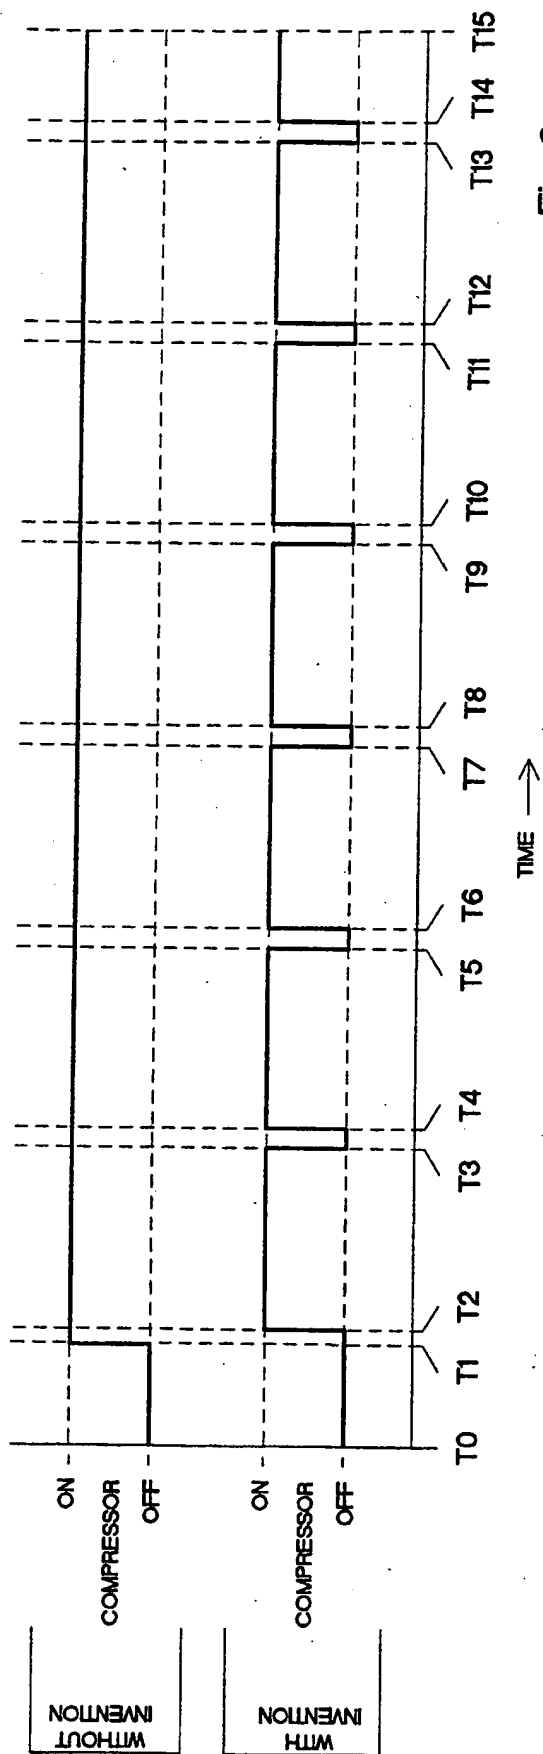


Fig. 6

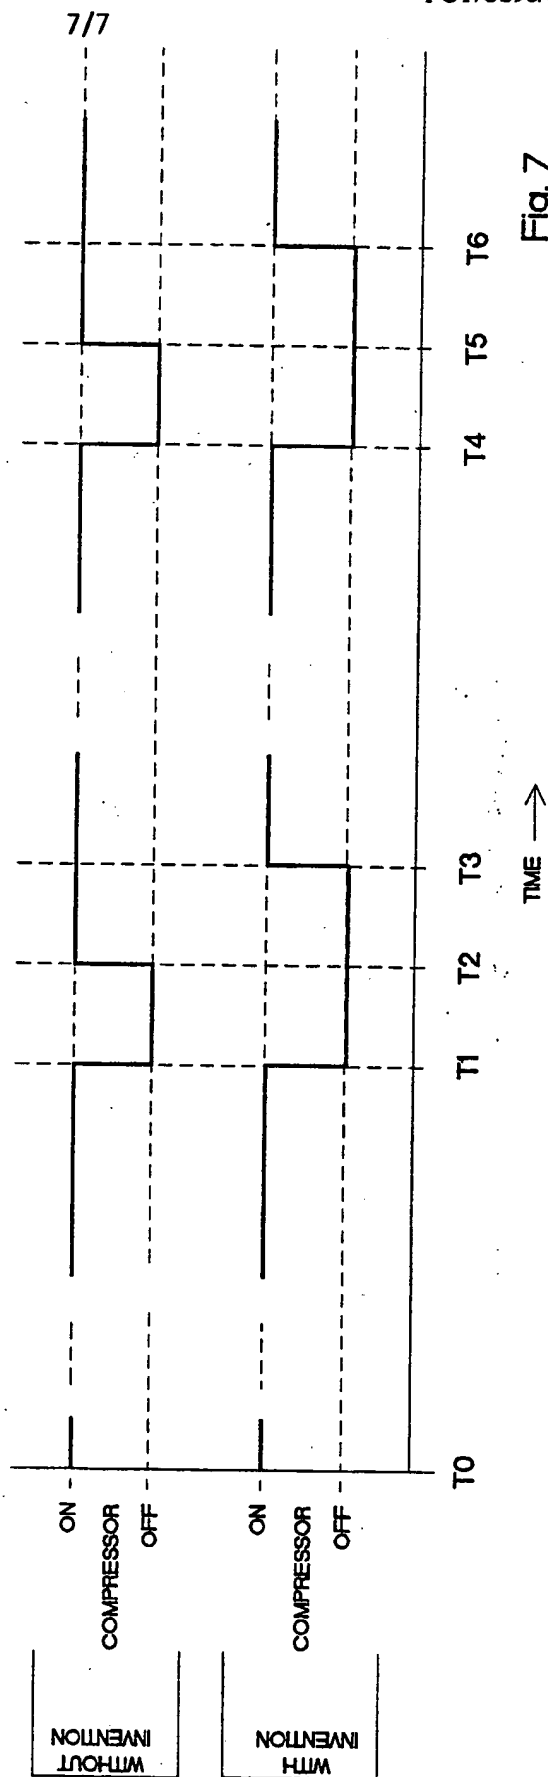


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/01550

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : F25B 19/00 ; G05D 23/32

US CL : 62/158,231

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 62/158,231 ; 236/46.R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, 4,537,038 A (ALSENZ ET AL) 27 AUGUST 1985, SEE FIGURE 2.	1, 2, 7-9, 16, 17
Y	US, 4,136,730 A (KINSEY) 30 JANUARY 1979, SEE THE FIGURE.	4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A document defining the general state of the art which is not considered to be of particular relevance	*X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E earlier document published on or after the international filing date	*Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G document member of the same patent family
*O document referring to an oral disclosure, use, exhibition or other means	
*P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

27 APRIL 1998

Date of mailing of the international search report

20 JUL 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

WILLIAM WAYNER

Telephone No. (703) 308-1041

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/01550

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 10-14
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

THE SPECIFICATION DOES NOT DISCLOSE AN ELECTRONIC CIRCUIT FOR SENSING A WIDE RANGE OF VOLTAGE INPUTS.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐

The additional search fees were accompanied by the applicant's protest.

☐

No protest accompanied the payment of additional search fees.

THIS PAGE BLANK (USPTO)